


300/500 V 90°C 60227 IEC 57

4 CORES - HEAT-RESISTANT ORDINARY PVC-SHEATHED CORD WITH GROUND

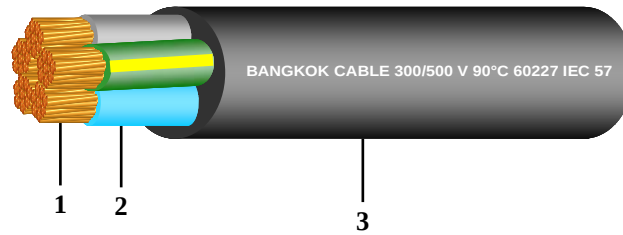

Construction

1. Conductor : Bunch stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
Colour code : Green/Yellow, Light Blue, Brown, Black, Grey
3. Sheath : Polyvinyl chloride (PVC), Black colour

Reference Standard :

TIS 11 Part 5-2553



Classification

- Maximum conductor temperature : 90°C
- Rated voltage : 300/500 V
- AC test voltage : 2,000 V

Application

- Use for connecting portable electric appliances (heavy duty)
- Use for wiring in lamp with/without ballast
- Use in an advertisement board/an electric signs

Products code	No. of core	Conductor				Thickness of insulation	Thickness of sheath	Overall diameter		Insulation resistance at 90°C	Current rating in free air	Cable weight	Standard length
		Cross- sectional mm ²		Dia. of wires (Max.)	Diameter (Approx.)			Lower limit mm	Upper limit mm				
C3LK049J4012	4	0.75	0.75	0.21	1.13	0.6	0.9	7.4	9.3	0.011	6	110	100/C
C3LK04744012	4	1	1	0.21	1.31	0.6	0.9	7.8	9.8	0.010	10	130	100/C
C3LK048N4012	4	1.5	1.5	0.26	1.58	0.7	1.1	9.3	11.6	0.010	16	190	100/C
C3LK042P4012	4	2.5	2.5	0.26	2.04	0.8	1.2	11.2	13.9	0.009	20	290	100/C

C = Packing in coil